

DL

		II
		1
		1
		1
		2
		2
		2
		3
		5
		6
		7
11		9
12		9

GB/T 1.1-2020

1

1 100761

GB18484

HJ 75 HJ 76

GB 18484

500

50

GB 50264

DCS

PLC

DCS

DCS

4.10

GB18484

2

500

6.1.1

500

200

6.1.2

1

65%~150%

500 200 1.5
 80 μ m 350 μ m

SO₂ HCl

a)

b)

c)

d)

e)

a) 2 1

b)

c) 1 1

a)

b) 20

c)

d)

e)

20 30

DL/T 1967

CFB (NID)

CFB DL/T 1967
(NID) DL/T 1967

a) DL/T 1967
b) 90% 200 2%
c)
d)

MCR 3d 5d
e

a)
b)
c) 4d 7d
d) 1d
e)

a)
b)
c) pH 10s
d) 3.5m 500Pa
e)
f) 1
g)

a)
b)

- c)
/
PTFE
0.1%
2000Pa,
- d)
10

1 2

pH		5 7.5
		<8
		≤ 3
	kg/m³	400 500
	m²/g	≥ 900
		800

	mm			
	0.150	0.074	0.044	0.010
%	>97	>87	>72	>40

MCR 3d 7d

HJ 2012

DL/T 1589

10 20
PTFE

PTFE

0.9m/min

3%

0.15

JB/T 7671

2Ω

1m/s~4m/s


300mm~400mm

JB/T 11638

HJ/T 320

JB/T 11074

DCS

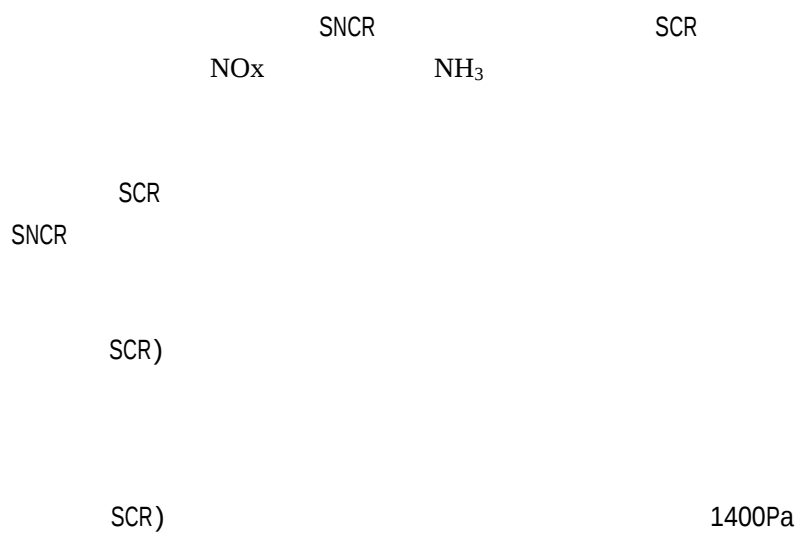

a) ,

b)

c)

d)

a) 4m/s 6m/s

b)

c)

d)

e)

f)

a) -

PTFE

b) SCR) ,

a)	900	1100	850	1050
b)				
c)				
d)				
e)				
f)				
g)				
		SCR		10.2.8
10.2.9			2	
		180		150 ~200
				1s
10.4.7				
10.4.8				
10.4.9			2%	
10.4.10				
11				
			GB50264	
	0.5m/min			
		1.5m		
12				
	GB/T 16157	HJ 836	HJ 75	
			HJ 75	HJ 76

